

Simulation of the impacts on carbon dioxide emissions from replacement of a conventional Brazilian taxi fleet by electric vehicles

Ana Carolina Rodrigues Teixeira, M.Sc.

Pontifical Catholic University of Minas Gerais

Department of Mechanical Engineering

Av. Dom José Gaspar, 500 - 30535-901 – Belo Horizonte – MG - Brazil

Phone: +55-31-9171-0404 - Fax: +55-31-3319-4910 - E-mail: acrt88@hotmail.com

José Ricardo Sodr , Ph.D.*

Pontifical Catholic University of Minas Gerais

Department of Mechanical Engineering

Av. Dom José Gaspar, 500 - 30535-901 – Belo Horizonte – MG - Brazil

Phone: +55-31-3319-4911 - Fax: +55-31-3319-4910 - E-mail: ricardo@pucminas.br

* Corresponding author

ABSTRACT

This work evaluates the effects of the replacement of engine-powered vehicles by electric vehicles on carbon dioxide (CO₂) emissions and energy consumption. A case study of a taxi fleet replacement was conducted with the aid of the AVL Cruise software. The simulation was performed under different scenarios of total or partial fleet replacement along a period of 15 years. The scenarios were designed considering favorable and unfavorable conditions for electricity production from a clean source, thus influencing the CO₂ emission factor adopted. The simulations showed that the electric energy consumption by the electric vehicles is about four times lower than fuel energy consumption by the conventional vehicles undergoing a standard test schedule. At the end of the period considered the electric vehicles will produce lower CO₂ emissions than the conventional vehicle fleet by a factor of 10, even considering the most unfavorable scenario of electric power generation. An economic analysis shows that the present value of electric vehicles over the years is lower than that of conventional vehicles, except for the first year after vehicle acquisition.

Keywords: electric vehicle; CO₂ emissions; energy; fuel consumption; sustainable development.

1. INTRODUCTION

To improve air quality, increasingly strict regulation laws require reduced automotive emissions, which has influenced the development of clean technologies [1]. Those technologies include electric vehicles (EVs), hybrid electric vehicles (HEVs) and plug-in hybrid electric vehicles (PHEVs) [2]. The possible reduction of carbon dioxide (CO₂) emissions with the use of those technologies also contribute to reduce global temperature increase, one of the key factors for climate change [3]. In order to reduce automotive emissions many countries adopt increasingly strict regulating laws [4]. The need to reduce carbon emissions motivates the use of renewable energy sources in the electricity matrix [5]. The demand for sustainable actions inspires the rise of solutions with higher energy efficiency [6]. Those solutions are generally characterized by less oil dependence and reduced fuel consumption [7]. In this sense, there are many studies on EVs as a possible viable alternative, especially in countries with clean electricity matrix [8].

The positive and negative aspects of the replacement of engine-powered vehicles by electrical vehicles are identified for specific fleets [9]. One of the advantages of EVs is the absence of exhaust emissions [10]. Another advantage is the reduced noise during operation [11]. The reduction of both noise and emissions also help to reduce health risks [12]. In comparison with conventional vehicles, EVs require minimal maintenance [13]. In addition, they have lower operation cost and higher efficiency [14]. The advantages are increased with the possibility of using the EVs in distributed generation [15]. The use of electricity produced from fossil fuels reduces their advantages [16].

One of the disadvantages of EVs is their lower autonomy, in comparison with conventional vehicles [17]. Also, EVs need the development of recharging infrastructure, which already exists for conventional vehicles [18]. Increasing use of EVs demands increased

electricity provision [19]. Sustainability aspects of the use of EVs requires adequate battery disposal/recycling [20]. Finally, the main barrier for EVs is their high initial costs [12].

EVs are good alternatives in countries with low emission electricity matrix and cities with small geographic extension, since in this case they can operate all day with a single recharge. According to Tarroja et al. [21], it is preferable to produce the electricity used in EVs from renewable sources, depending on availability and load demand.

The use of EVs may provoke increased emissions from electric power generation. Monteiro et al. [22] point out that the largest CO₂ producers are power plants, responsible by around 40% of the world electricity production. Therefore, for the use of EVs it is desirable low-emission electricity matrices, which is the case of Brazil, for instance, where CO₂ emissions from electricity generation are low (about 135 gCO₂/kWh) in comparison with other countries. In countries such as Poland and Greece, the CO₂ emission factor from electricity generation is around 850 gCO₂/kWh.

A study developed by Varga [23] used the AVL Cruise software to simulate four different types of electric vehicles to determine the energy consumption using the New European Driving Cycle (NEDC). The results for energy consumption ranged from 0.104 to 0.127 kWh/km. This data was used to calculate CO₂ emissions from those vehicles in Romania based on electric power plant emissions during the period from 2004 to 2008, producing values that varied from 84 to 115.9 g/km.

Yuan et al. [24] simulated an electric vehicle using the AVL Cruise software and evaluated CO₂ emissions for different driving cycles (New European Driving Cycle – NEDC, 1975 U.S. Federal Test Procedure – FTP-75, Japanese Modal Cycle – JC-0, and Worldwide Harmonized Light Duty Test Cycle – WLTC) and driving ranges in China. The authors used a high CO₂ emission factor range (736 g/kWh to 1147 g/kWh), taking coal as the main source of power generation in the country. The emission factor used was 855 g/kWh, although the

authors recognized that this value varies in the different parts of the country. Simulated results showed electric vehicle energy consumption around 0.16 kWh/km and CO₂ emissions about 105 g/km in the FTP-75 driving cycle. The authors concluded that, for the Chinese energy matrix, the use of EVs could reduce CO₂ emissions only for operation in distances shorter than 250 km, if compared to conventional vehicles.

The objective of this work is to analyze further the impacts of the replacement of conventional vehicles by electric vehicles on energy consumption and CO₂ emissions. The study is performed using the AVL Cruise software to simulate two similar vehicle models, one powered by an internal combustion engine and the other electric. The benefits of replacing conventional vehicles by EVs are verified using as a case study a taxi fleet of a Brazilian city, where hydroelectric power plants account for over 70% of electricity generation. The use of a renewable source of electricity is expected to increase the advantages of EVs in comparison with previous works, where the studies considered electric matrices based on fossil fuels. The extent of the reduction of CO₂ emission from the use of EVs powered by an electric matrix based on renewables is presented using different scenarios of gradual fleet replacement. An economic analysis was performed to verify the costs of replacement.

2. METHODOLOGY

The emissions of CO₂ from two vehicles of similar model were compared, one conventional, powered by an internal combustion engine (vehicle A), and the other electric (vehicle B). Table 1 presents the details of each vehicle. Vehicle A is the model that best represents the average taxi fleet in operation, which, in reality, is composed by different vehicle models. Both vehicles, A and B, were simulated under the Federal Test Procedure 75

(FTP-75) driving cycle using the AVL Cruise software. CO₂ emissions from vehicle A was calculated considering complete combustion [25], as follows:

(1)

The fuel consumption map of vehicle A, available from the manufacturer, was used to evaluate the equivalent energy consumption considering the fuel as a blend of composition 78% gasoline and 22% ethanol (E22), according to:

As no database is available in Brazil for other pollutant gas components emitted from power generation, CO₂ is the only component here evaluated, as it was done in previous studies [26,27]:

(3)

Four scenarios of different replacement rates of a conventional engine powered taxi fleet by electric vehicles were designed as a case study. The conventional fleet is composed by 213 vehicles, and the period of evaluation is 15 years. The fleet replacement rates adopted were 25%, 50%, 75% and 100%, with all vehicles being replaced in the beginning of the period of evaluation. Two scenarios were optimistic and two pessimistic (Tab. 3), and differ from each other according to the adopted CO₂ emission factor and average distance traveled by taxi per day. For each scenario daily travel distances of 200 km and 400 km by each taxi

were considered, representing the minimum and the maximum values. In holiday months, the taxis were assumed to travel an additional distance of 100 km per day.

In the first scenario, a low CO₂ emission factor of 30 gCO₂/kWh was considered, corresponding to the use of hydroelectric power to supply over 70% of the electricity demand. In scenario 2, the CO₂ emission factor was slightly higher than in scenario 1 (50 gCO₂/kWh) to consider a small replacement of hydroelectric power by thermoelectric power as a response to dry winter conditions, which reduce the capacity of hydroelectric power plants. In the third and fourth scenarios, the assumption of low rain levels per year means that most of the hydroelectric power is replaced by thermoelectric power, leading to the adoption of higher emission factors.

For the calculations, the EVs electric energy consumption and the fuel consumption of the conventional vehicles were taken as constant parameters. Each month was considered to have an average of 30 days. The EVs batteries were taken as fully charged early in the day. In all scenarios, an annual growth rate of 5% was assumed for the emission factors.

An economic analysis of the cash flow, present value and net present value was performed for both vehicles considering the cost of acquisition, operation and maintenance, and the taxi driver income. The analysis was based on the replacement of a conventional vehicle by an electric one. The acquisition price of the electric vehicle model studied in this work was estimated, because it is still a concept and is not yet available for retail, taking into consideration the price difference of other vehicle models publicly available in conventional and electric versions. Thus, the acquisition prices of US\$ 8,780.2611 for vehicle A and US\$ 34,382.26 for vehicle B were adopted. The operation costs were based on the fuel used by vehicle A and the electric energy consumed by vehicle B. The inflation rates for fuel and energy consumption were considered 4.00% yr. and 4.86% yr., respectively, which represent the average between 2004 and 2015. The operation costs of vehicle A (C_{Op}) are:

—

where $C_{Of,i}$ is fuel cost in 2015 (1.046 US\$/L), I_{Rf} is the fuel inflation rate (%), t is the period from the initial time (year), η_f is the fuel consumption efficiency of vehicle A (km/L), and d is the annual travel distance (km).

The operation costs of vehicle B (C_{Oe}) were calculated similarly to vehicle A:

—

where CO_{ei} is the energy cost in 2015 (0.226 US\$/kWh), I_{Re} is the energy inflation rate (%), and η_e is the energy consumption efficiency of vehicle B (kWh/km).

The maintenance costs for vehicle A was based on the study developed by Wang et al [28], taken as 0.215 US\$/km in 2015. According to some authors [28,29], the maintenance costs of electric vehicles are half that of conventional vehicles. Hence, the maintenance costs of vehicle B was considered 0.1075 US\$/km in 2015. The maintenance costs of vehicle A (C_{MA}) and vehicle B (C_{MB}) in the following years are calculated by:

(6)

(7)

where C_{MAi} and C_{MBi} are the maintenance costs of vehicle A and vehicle B in 2015, respectively, and I_R is the average annual inflation rate.

The revenue of the cash flow was taken as the taxi driver income, considering the taxi fare of 0.83 US\$/km. The taxi was considered to travel 200 km per day, with a lifecycle of 5 years, according to the law. The net present value (NPV) was calculated by:

where C_i is the initial cost (US\$), F_C is the cash flow (US\$) and I_D is the discount rate (%).

3. RESULTS

Results from the simulations of CO₂ emissions and fuel consumption, for vehicle A, and energy consumption, for vehicle B, are presented in Tabs. 3 and 4, respectively. Figure 1 shows the accumulated fuel energy consumption and CO₂ emissions of vehicle A, and the accumulated energy consumption of vehicle B. The accumulated energy consumption of vehicle A is nearly four times higher than that of vehicle B, showing that the use of EVs is highly advantageous in terms of energy consumption. This is a direct effect of the fuel conversion efficiency of the internal combustion engines used in conventional vehicles, which is typically around 25% and is much lower than the energy conversion efficiency of electric vehicles [16]. Figures 2 to 5 show CO₂ emissions that would be avoided with the replacement of the conventional vehicles by EVs in each scenario studied. In all scenarios, different emission factors and travel distances were considered.

Figure 2 shows the reduction of CO₂ emissions for 25% of fleet replacement by EVs. Scenarios 1 and 2 showed low reduction of CO₂ emissions, of around 770 tons of CO₂ by 2030, considering the travel distance of 200 km per day. Both scenarios show close results,

since the emissions factors have little difference. In scenarios 3 and 4, for which the emission factors are higher, the reductions reached around 700 tons of CO₂, lower than that of scenarios 1 and 2. This behavior was the same for all vehicle replacement rates, thus expressing a general trend. However, for taxis that operate 400 km a day, these values are higher, reaching 1,040 tons of CO₂ for scenarios 1 and 2, and 960 and 980 tons of CO₂ for scenarios 3 and 4, respectively.

The reduction of CO₂ emissions from the replacement of 50% of the fleet by EVs is presented in Fig. 3. Scenarios 1 and 2 showed a reduction of around 1,520 tons of CO₂ emissions, considering vehicle operation of 200 km per day. In scenarios 3 and 4, the reductions were 1,422 and 1,400 tons of CO₂, respectively. Considering the travel distance of 400 km, these values change to 2080 tons of CO₂ for scenarios 1 and 2, and 1,950 and 1,915 tons of CO₂ for scenarios 3 and 4, respectively.

Figure 4 shows the emissions reduction for replacing 75% of the taxi fleet. For vehicles that travel 200 km a day, scenarios 1 and 2 showed a reduction of around 2,280 tons of CO₂ by 2030. In scenarios 3 and 4, the reductions were 2,135 and 2,101 tons of CO₂, respectively. For the distance of 400 km, these values were 3,135 and 3,115 tons of CO₂ for scenarios 1 and 2, and 2,925 and 2,873 tons of CO₂ for scenarios 3 and 4, respectively.

Figure 5 shows the reduction of CO₂ emission if the whole fleet was replaced by EVs. For taxis that travel 200 km a day, scenarios 1 and 2 show that, by 2030, the reduction of CO₂ emissions will be 3,050 and 3,033 tons of CO₂, respectively. In scenarios 3 and 4, the reductions are 2,846 and 2,801 tons of CO₂. For the distance of 400 km, these values are 4,180 and 4,153 tons of CO₂ for scenarios 1 and 2, and 3,900, and 3,830 tons of CO₂ for scenarios 3 and 4, respectively.

It is noticeable that longer daily travel distance by taxi produced higher reduction of CO₂ emissions for all scenarios studied (Figs. 2 to 5). The use of EVs to replace the

conventional consistently caused significant reductions in CO₂ emissions, due to the low emissions of the Brazilian electricity sector. This situation is different compared to countries where the electric matrix is coal-based and, consequently, fleet replacement does not generate negative credits and can even increase emissions. In scenarios 1 and 2, for which low emission factors were considered, the reduction on CO₂ emissions from fleet replacement by EVs does not change substantially along the period studied. In scenarios 3 and 4, where the emission factors are high, the benefits on CO₂ emissions from the use of EVs are reduced along the period considered.

Figure 9 compares CO₂ emissions from conventional vehicles and EVs for both travel distances, 200 km and 400 km. For scenarios 1 and 2, where the emission factors are low, CO₂ emissions are around 50 to 64 times lower when EVs are used instead of conventional vehicles. However, this ratio is reduced to around 31 by the year 2030, still making the use of EVs advantageous. For scenarios 3 and 4, the reductions of CO₂ emission from the use of EVs are much lower due to the high emission factors. In the beginning of the period studied, EVs emitted about 20 times less than conventional vehicles with internal combustion engines. However, by 2030, the EVs will emit around 12 to 10 times less than conventional vehicles in scenarios 3 and 4.

Comparing the present results with those obtained by Yuan et al. [27], who simulated different types of electric vehicles in China, the calculated energy consumption was close. However, CO₂ emissions were higher (105 g/km) in that work due to high emission factors adopted for the electric matrix. In the present study, CO₂ emissions varied from 2.85 to 17.79 gCO₂/km, using Brazilian emission factors. These figures are also lower than the results presented by Varga [26], who calculated CO₂ emissions from power generation between 84 and 115.9 gCO₂/km in Romania. Although the study presented by Varga [26] used a different driving cycle, which can lead to some discrepancy in the results, the divergence of values can

be mainly attributed to the differences in the electric matrices. While in Brazil hydroelectric power plants generate most of the energy demanded, in the countries considered in those studies [26,27] energy generation is coal-based, thus explaining the lower levels of CO₂ emissions here obtained.

An economic analysis verified if the replacement of conventional taxis by electric taxis is feasible, mainly for scenarios 3 and 4, where the replacements are up to 75%. The results are presented in Tab. 5 and Fig. 7. Table 5 shows the values calculated for the taxi driver income, vehicle acquisition cost, and annual maintenance and operation costs. Only in 2015, the value of vehicle A is higher than vehicle B, because the acquisition price of electric vehicles is higher than conventional vehicles. Over the years, the use of vehicle A is more expensive than vehicle B because of the higher efficiency of electric vehicles in comparison with conventional ones and the lower price of electric energy in Brazil in comparison with the equivalent fuel energy. The net present value in 5 years was US\$ 125,362.49 and US\$ 141,116.15 for vehicles A and B, respectively.

4. CONCLUSION

This work investigated the replacement of conventional, compact engine-powered vehicles of a taxi fleet by electric vehicles of similar models at the rates of 25%, 50%, 75% and 100%, using two different daily travel distances. The electric power consumed by the EVs was generated under four different scenarios of increasing participation of thermoelectric power in an electric matrix mainly constituted by hydroelectric power, consequently adopting increasing CO₂ emission factors. From the results obtained for both vehicle types undergoing a simulated U.S. FTP-75 test schedule, the following conclusions can be drawn:

- The fuel energy content consumed by the conventional, engine powered vehicles is about four times higher than the electric energy consumed by the electric vehicles;
- A reduction of CO₂ emissions from substitution of conventional vehicles by electric vehicles was observed for all power generation scenarios, travel distances and replacement rates applied;
- The amount of reduced CO₂ emissions is directly proportional to the applied replacement rate of conventional vehicles by EVs;
- The reduction of CO₂ emissions from the use of EVs increased about 37% when the daily travel distance by the taxi fleet was doubled;
- During the 15 years period analyzed, the reduction of CO₂ emissions from the substitution of conventional vehicles by EVs was decreased by around 6.1%, for 25% replacement rate, and about 1.7%, for 100% replacement rate, due to an annual increase of CO₂ emission factors from electricity generation;
- The total replacement of the taxi fleet by EVs would have an immediate impact from 18% to 64% of CO₂ emission reduction, respectively considering the most unfavorable condition of electricity generation, with high substitution of hydroelectric power by thermoelectric power, and the most favorable condition of electricity generation, with over 70% of the electricity being supplied by hydroelectric power;
- At the end of the 15 years period, the total replacement of the taxi fleet by EVs would cause CO₂ emission reduction from 9% to 30%, for the most unfavorable and the most favorable power generation conditions, respectively.
- Although the acquisition cost of an electric vehicle is higher than a conventional vehicle, the EVs have lower operation costs.

- The economic analysis shows that the replacement of conventional vehicles by electric vehicles in a taxi fleet is feasible, being profitable from the second year of utilization under the conditions of this study.

5. ACKNOWLEDGEMENTS

The authors thank CAPES, CNPq research project 304114/2013-8, FAPEMIG research projects TEC PPM 0136-13 and TEC PPM 0385-15, ANEEL/CEMIG research project D425, and AVL AST for the financial support to this work.

6. REFERENCES

- [1] Baran, R.; Legey, L. F. L. The introduction of electric vehicles in Brazil: Impacts on oil and electricity consumption. *Technological Forecasting & Social Change*, Vol. 80, pp 907–917, 2013.
- [2] Wu, Y. Energy consumption and CO₂ emission impacts of vehicle electrification in three developed regions of China, *Energy Policy*, Vol. 48, pp 537–550, 2012.
- [3] Mathiesen BV, Lund H, Karlsson K. 100% renewable energy systems, climate mitigation and economic growth. *Appl Energy* 2011;88(2):488-501.
- [4] Lund H, Mathiesen BV. Energy system analysis of 100% renewable energy systems - the case of Denmark in years 2030 and 2050. *Energy* 2009;34(5): 524-31.
- [5] Lund H, Andersen AN, Østergaard PA, Mathiesen BV, Connolly D. From electricity smart grids to smart energy systems e a market operation based approach and understanding. *Energy* 2012;42(1):96-102.

- [6] Barkenbus, J. Our electric automotive future: CO₂ savings through a disruptive technology. *Policy and Society*, Vol. 27, pp 399–410, 2009.
- [7] Becker, T.A. *Electric Vehicles in the United States—A New Model with Forecasts to 2030*, Center for Entrepreneurship & Technology University of California, Berkeley—Technical Brief, 2009.
- [8] Flórez-Orrego, D.; Silva, J. A. M.; Velásquez, H.; Oliveira Jr., S. Renewable and non-renewable exergy costs and CO₂ emissions in the production of fuels for Brazilian transportation sector, *Energy*, Vol.88, pp 18-36, 2015.
- [9] Lund, H; Kempton, W. Integration of renewable energy into the transport and electricity sectors through V2G. *Energy Policy*, Vol. 36, pp 3578-3587, 2008.
- [10] Axsen, J.; Orlebar, C.; Skippon, S. Social influence and consumer preference formation for pro-environmental technology: The case of a U.K. workplace electric-vehicle study. *Ecological Economics*, Vol.95, pp 96-107, 2013.
- [11] Hoyer, K. G. The history of alternative fuels in transportation: The case of electric and hybrid cars, *Utilities Policy*, Vol. 16, pp 63-71, 2008.
- [12] Graham-Rowe, E. et al. Mainstream consumers driving plug-in battery-electric and plug-in hybrid electric cars: A qualitative analysis of responses and evaluations, *Transportation Research*, Vol. 46, pp 140-153, 2012.
- [13] Riezenman, M. J. Electric vehicles, *IEEE Spectrum*, Vol. 29, pp 18-21, 1992.
- [14] Bradley, T. H.; Frank, A. A. Design, Demonstration and Sustainability Impact Assessments for Plug-In Hybrid Electric Vehicles, *Renewable Sustainable Energy Reviews*, Vol. 13, n.1, pp 115–128, 2009.
- [15] Weiller, C.; Neely, A. Using electric vehicles for energy services: Industry perspectives, *Energy*, Vol. 77, pp 194-200, 2014.

- [16] Shukla, A. K.; Aricò, A. S.; Antonucci, V., An Appraisal of Electric Automobile Power Sources, *Renewable and Sustainable Energy Reviews*, Vol. 5, No. 2, pp 137–155, 2011
- [17] Benysek, G.; Jarnut, M. Electric vehicle charging infrastructure in Poland, *Renewable and Sustainable Energy Reviews*, Vol. 16, pp 320– 328, 2012.
- [18] Dijk, M.; Orsato, R. J.; Kemp, R. The emergence of an electric mobility trajectory, *Energy Policy*, Vol. 52, pp 135–145, 2013.
- [19] Cui, X. et al. Simulating the Household Plug-In Hybrid Electric Vehicle Distribution and Its Electric Distribution Network Impacts, *Transportation Research Part D*, Vol. 17, No. 7, pp 548–554, 2012.
- [20] Jungst, R. Recycling of electric vehicles batteries, *Industrial Chemistry Library*, Vol. 10, pp 295–327, 2001.
- [21] Tarroja, B.; Shaffer, B.; Samuelsen, S. The importance of grid integration for achievable greenhouse gas emissions reductions from alternative vehicle technologies, *Energy*, Vol. 87, pp 504-519, 2015.
- [22] Monteiro, V.; Gonçalves, H.; Afonso, J. L. Impact of electric vehicle on power quality in a smart grid context. 11th International Conference on Electrical Power Quality and Utilisation (EPQU), 2011, 6 p.
- [23] Varga, B. O. Electric vehicles, primary energy sources and CO₂ emissions: Romanian case study, *Energy*, Vol. 49, pp 61-70, 2013.
- [24] Yuan, X.; Li, L.; Gou, h.; Dong, T. Energy and environmental impact of battery electric vehicle range in China, *Applied Energy*, Vol. 157, pp 75–84, 2015.
- [25] Oh, Y.; Park J.; Lee, J.; Eom, M.D.; Park, S. Modeling effects of vehicle specifications on fuel economy based on engine fuel consumption map and vehicle dynamics. *Transportation Research Part D*, Vol. 32, pp. 287–302, 2014.

- [26] Howey, D. A. et al. Comparative measurements of the energy consumption of 51 electric, hybrid and internal combustion engine vehicles, *Transportation Research Part D*, Vol. 16, pp 459–464, 2011.
- [27] Lorf, C. et al. Comparative analysis of the energy consumption and CO₂ emissions of 40 electric, plug-in hybrid electric, hybrid electric and internal combustion engine vehicles, *Transportation Research Part D*, Vol. 23, pp 12–19, 2013.
- [28] Wang, N. et al. Cost–benefit assessment and implications for service pricing of electric taxis in China, *Energy for Sustainable Development*, Vol. 27, pp 137–146, 2015.
- [29] Bickert, S. et al. Developments of CO₂-emissions and costs for small electric and combustion engine vehicles in Germany, *Transportation Research Part D*, Vol. 36, pp 138–151, 2015.

7. NOMENCLATURE

C_F	Fuel carbon content
C_{MAi}	Cost of maintenance of conventional vehicle in the initial year (2015) (US\$/year)
C_{MBi}	Cost of maintenance of electrical vehicle in the initial year (2015) (US\$/year)
$C_{Oe,i}$	Energy cost in the initial year (2015) (US\$/kWh)
$C_{Of,i}$	Fuel cost in the initial year (2015) (US\$/L)
CO_2	Carbon dioxide
d	Travel distance in the FTP-75 test schedule or annual traveled distance (km)
E_E	Electric energy consumption (kW.h/km)
E_F	Fuel energy consumption (kW.h/km)
EVs	Electric vehicles
f_{CO_2}	Emission factor of CO ₂ (tCO ₂ /kWh)
FTP-75	Federal Test Procedure 75

I_D	Discounted rate (%)
ICEVs	Vehicles with internal combustion engine
JC-0	Japanese Modal Cycle
	Fuel consumption (kg/h)
M_{CO_2}	Molar mass of CO ₂ (kg/kmol)
M_F	Molar mass of fuel (kg/kmol)
NEDC	New European Driving Cycle
NPV	Net Present Value
Q_{LHV}	Low heating value of fuel (kJ/kg)
SIN	Brazilian National Grid System
t	Travel time in the FTP-75 test schedule (h) or time after initial year (year)
I_R	Average annual inflation rate y.y (%)
I_{Re}	Energy inflation rate y.y (%)
I_{Rf}	Fuel (gasoline) inflation rate y.y (%)
WLTC	Worldwide Harmonized Light Duty Test Cycle
η_f	Fuel consumption efficiency of conventional vehicle (km/L)
η_e	Energy consumption efficiency of electric vehicle (kW.h/km)

LIST OF TABLE CAPTIONS

Table 1. Details of vehicles.

Table 2. Scenarios of vehicle fleet replacement.

Table 3. CO₂ emissions, fuel and energy consumption of vehicle A.

Table 4. Accumulated and specific energy consumption of vehicle B.

Table 5. Results from the economic analysis.

LIST OF FIGURE CAPTIONS

Figure 1. Accumulated fuel energy consumption and CO₂ emissions of vehicle A, and accumulated electric energy consumption of vehicle B.

Figure 2. CO₂ reduction for replacement of 25% of the taxi fleet.

Figure 3. CO₂ reduction for replacement of 50% of the taxi fleet.

Figure 4. CO₂ reduction for replacement of 75% of the taxi fleet.

Figure 5. CO₂ reduction for replacement of 100% of the taxi fleet.

Figure 6. Ratio between CO₂ emissions from the vehicles powered by internal combustion engines (ICEV) and from the electric vehicles (EV).

Figure 6. Cash flow and present value over the years.

Table 1. Details of vehicles.

PARAMETER	SPECIFICATION	
	VEHICLE A	VEHICLE B
Bore × stroke	70.0 mm × 64.9 mm	-
Compression ratio	12.15:1	-
Volume displacement	1.0 L	-
Rated power	53.7 kW @ 6250 rpm	15 kW
Rated torque	93.2 Nm @ 4500 rpm	50 Nm
Fuel	E22	-
Battery type	-	Sodium-Nickel-Chlorine
Voltage	-	253 V
Energy	-	19.2 kW.h
Recharge time	-	8 hours

Table 2. Scenarios of vehicle fleet replacement.

SCENARIO	CO ₂ EMISSION FACTOR (gCO ₂ /kWh)	WEATHER CONDITIONS	DISTANCE TRAVELED BY A TAXI FOR A DAY (km)
1	30	Favorable	200 – 400
2	30 – 50		
3	90	Unfavorable	
4	90 – 140		

Table 3. CO₂ emissions, fuel and energy consumption of vehicle A.

VEHICLE A	
CO ₂ emissions (g/km)	182.74
Fuel consumption (km/L)	11.91
Energy consumption (kWh/km)	0.6830

Table 4. Accumulated and specific energy consumption of vehicle B.

VEHICLE B	
Accumulated energy consumption (kWh)	2.267
Specific energy consumption (kWh/km)	0.0951

Table 5. Results from the economic analysis.

VEHICLE A							
Year	Revenue	Acquisition Cost	Annual Maintenance	Operation	Cash Flow	Present Value	Net Present Value
2015	\$39,988.67	-\$8,780.11		-\$4,249.78	\$26,958.78	\$26,958.78	
2016	\$39,988.67		-\$10,337.21	-\$4,419.77	\$25,231.69	\$23,673.95	
2017	\$39,988.67		-\$11,742.34	-\$4,596.56	\$23,649.77	\$20,819.75	\$123,170.22
2018	\$39,988.67		-\$12,514.98	-\$4,780.42	\$22,693.26	18,744.32	
2019	\$39,988.67		-\$13,338.47	-\$4,971.63	\$21,678.56	16,800.70	
2020	\$39,988.67		-\$12,576.79	-\$5,170.50	\$22,241.37	16,172.71	
VEHICLE B							
Year	Revenue	Acquisition Cost	Annual Maintenance	Operation	Cash Flow	Present Value	Net Present Value
2015	\$39,988.67	-\$28,090.14		-\$1,028.85	\$10,869.66	\$10,869.66	
2016	\$39,988.67		-\$5,168.60	-\$1,078.86	\$33,741.20	\$31,658.09	
2017	\$39,988.67		-\$5,871.16	-\$1,131.29	\$32,986.20	\$29,038.94	\$141,116.15
2018	\$39,988.67		-\$6,257.49	-\$1,186.27	\$32,544.89	\$26,881.64	
2019	\$39,988.67		-\$6,669.23	-\$1,243.92	\$32,075.50	\$24,858.25	
2020	\$39,988.67		-\$7,108.07	-\$1,304.38	\$31,576.21	\$22,960.50	

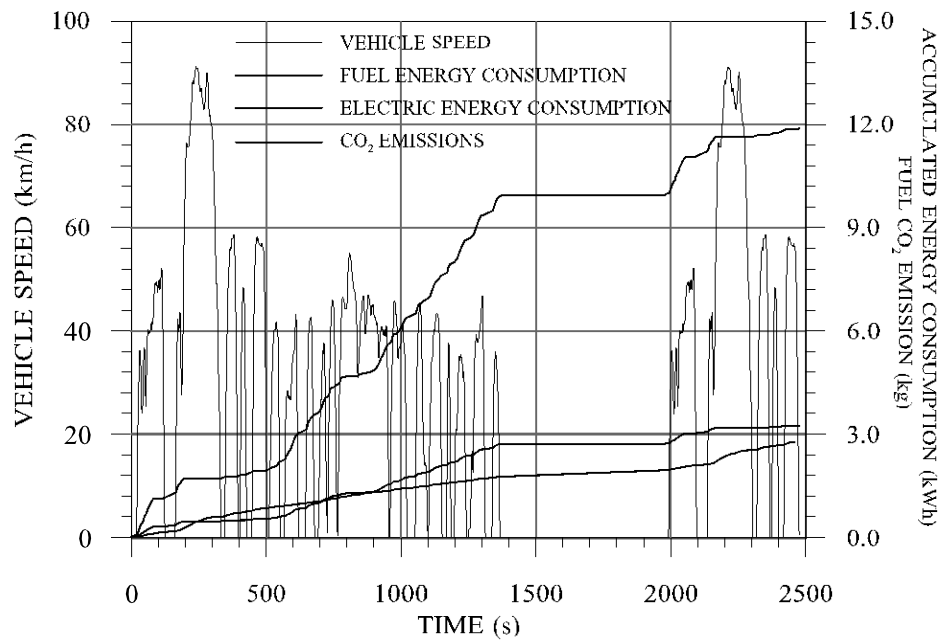


Figure 1. Accumulated fuel energy consumption and CO₂ emissions of vehicle A, and accumulated electric energy consumption of vehicle B.

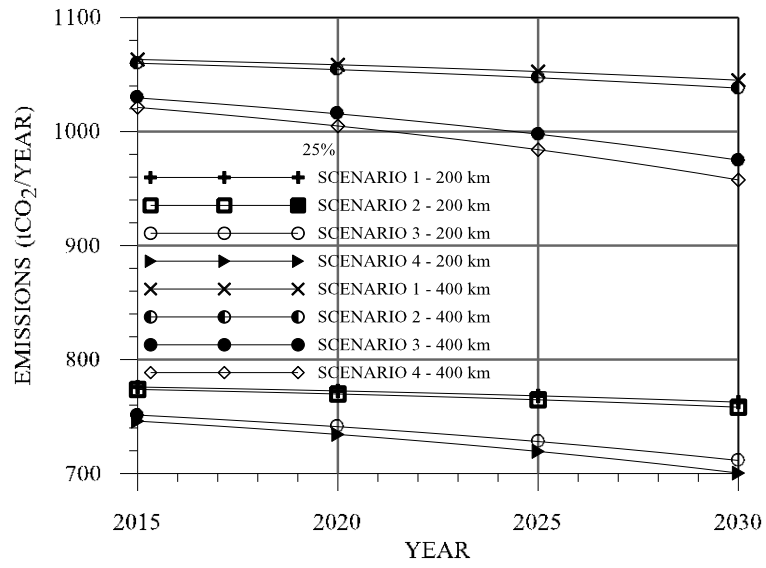


Figure 2. CO₂ reduction for replacement of 25% of the taxi fleet.

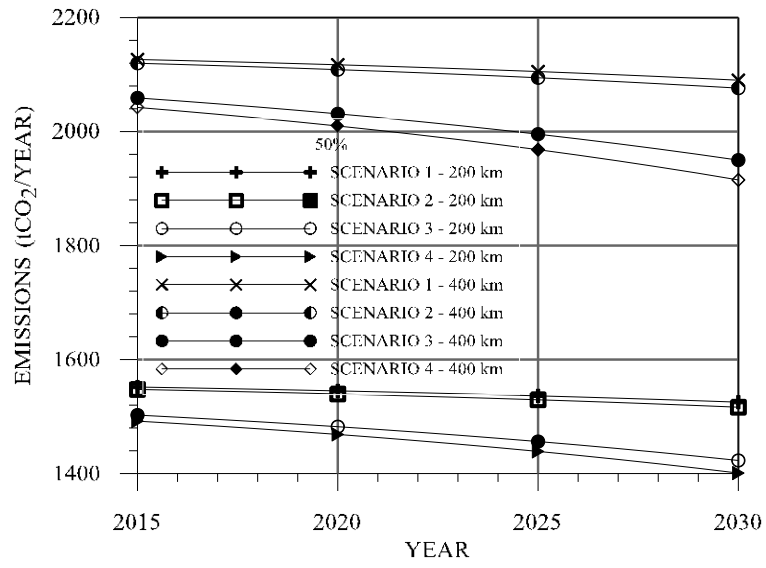


Figure 3. CO₂ reduction for replacement of 50% of the taxi fleet.

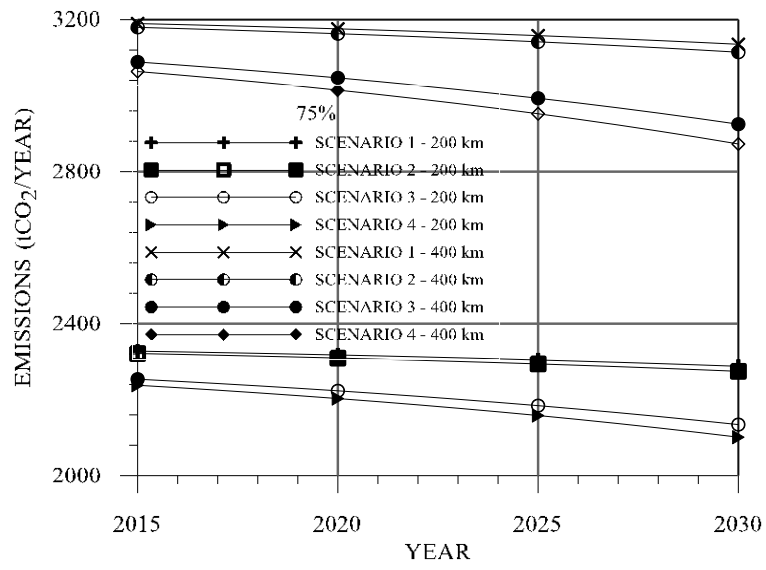


Figure 4. CO₂ reduction for replacement of 75% of the taxi fleet.

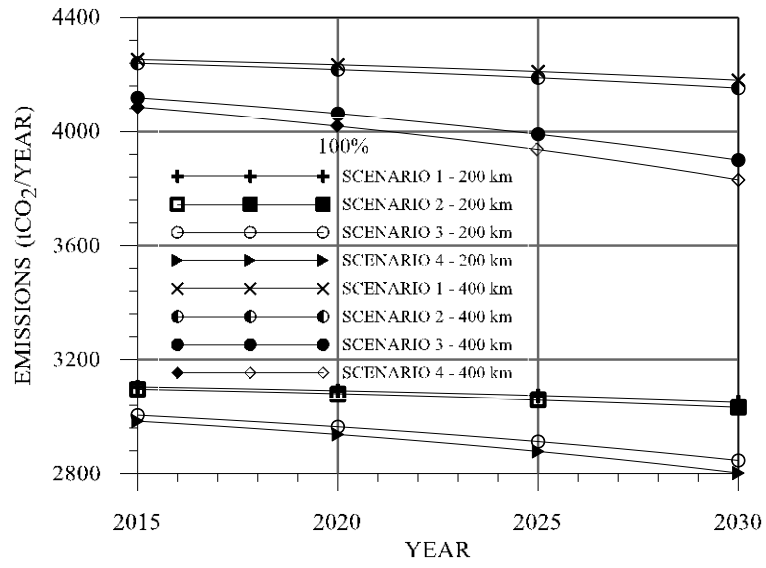


Figure 5. CO₂ reduction for replacement of 100% of the taxi fleet.

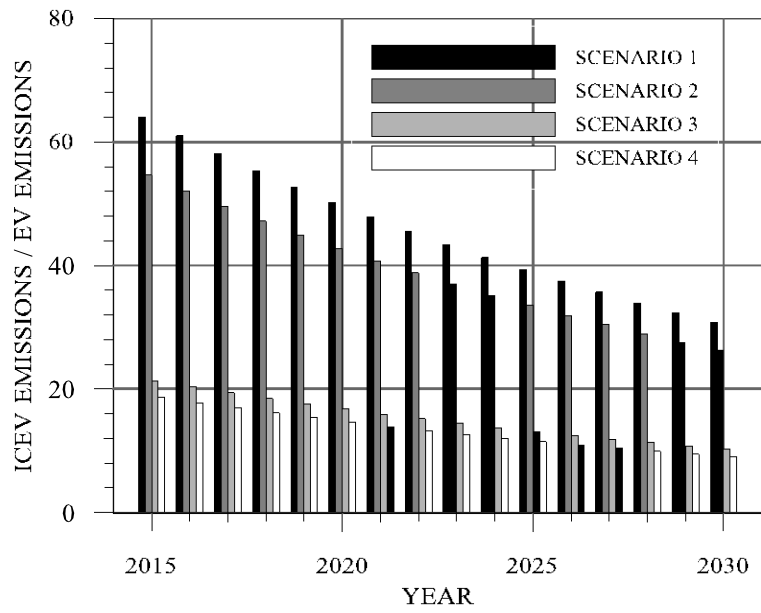


Figure 6. Ratio between CO₂ emissions from the vehicles powered by internal combustion engines (ICEV) and from the electric vehicles (EV).

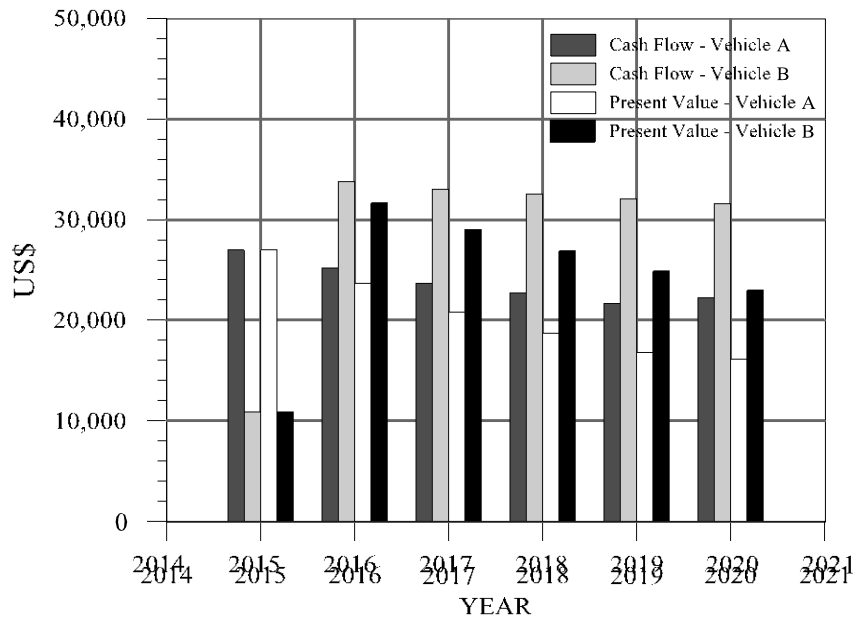


Figure 6. Cash flow and present value over the years.

**Simulation of the impacts on carbon dioxide emissions from replacement of
a conventional Brazilian taxi fleet by electric vehicles**

Ana Carolina Rodrigues Teixeira, M.Sc.

Pontifical Catholic University of Minas Gerais

Department of Mechanical Engineering

Av. Dom José Gaspar, 500 - 30535-901 – Belo Horizonte – MG - Brazil

Phone: +55-31-9171-0404 - Fax: +55-31-3319-4910 - E-mail: acrt88@hotmail.com

José Ricardo Sodr , Ph.D.*

Pontifical Catholic University of Minas Gerais

Department of Mechanical Engineering

Av. Dom José Gaspar, 500 - 30535-901 – Belo Horizonte – MG - Brazil

Phone: +55-31-3319-4911 - Fax: +55-31-3319-4910 - E-mail: ricardo@pucminas.br

*Corresponding author

ABSTRACT

This work evaluates the effects of the replacement of engine-powered vehicles by electric vehicles on carbon dioxide (CO₂) emissions and energy consumption. A case study of a taxi fleet replacement was conducted with the aid of the AVL Cruise software. The simulation was performed under different scenarios of total or partial fleet replacement along a period of 15 years. The scenarios were designed considering favorable and unfavorable conditions for electricity production from a clean source, thus influencing the CO₂ emission factor adopted. The simulations showed that the electric energy consumption by the electric vehicles is about four times lower than fuel energy consumption by the conventional vehicles undergoing a standard test schedule. At the end of the period considered the electric vehicles will produce lower CO₂ emissions than the conventional vehicle fleet by a factor of 10, even considering the most unfavorable scenario of electric power generation. An economic analysis shows that the present value of electric vehicles over the years is lower than that of conventional vehicles, except for the first year after vehicle acquisition.

Keywords: electric vehicle; CO₂ emissions; energy; fuel consumption; sustainable development.

1. INTRODUCTION

To improve air quality, increasingly strict regulation laws require reduced automotive emissions, which has influenced the development of clean technologies [1]. Those technologies include electric vehicles (EVs), hybrid electric vehicles (HEVs) and plug-in hybrid electric vehicles (PHEVs) [2]. The possible reduction of carbon dioxide (CO₂) emissions with the use of those technologies also contribute to reduce global temperature increase, one of the key factors for climate change [3]. In order to reduce automotive emissions many countries adopt increasingly strict regulating laws [4]. The need to reduce carbon emissions motivates the use of renewable energy sources in the electricity matrix [5]. The demand for sustainable actions inspires the rise of solutions with higher energy efficiency [6]. Those solutions are generally characterized by less oil dependence and reduced fuel consumption [7]. In this sense, there are many studies on EVs as a possible viable alternative, especially in countries with clean electricity matrix [8].

The positive and negative aspects of the replacement of engine-powered vehicles by electrical vehicles are identified for specific fleets [9]. One of the advantages of EVs is the absence of exhaust emissions [10]. Another advantage is the reduced noise during operation [11]. The reduction of both noise and emissions also help to reduce health risks [12]. In comparison with conventional vehicles, EVs require minimal maintenance [13]. In addition, they have lower operation cost and higher efficiency [14]. The advantages are increased with the possibility of using the EVs in distributed generation [15]. The use of electricity produced from fossil fuels reduces their advantages [16].

One of the disadvantages of EVs is their lower autonomy, in comparison with conventional vehicles [17]. Also, EVs need the development of recharging infrastructure, which already exists for conventional vehicles [18]. Increasing use of EVs demands increased

electricity provision [19]. Sustainability aspects of the use of EVs requires adequate battery disposal/recycling [20]. Finally, the main barrier for EVs is their high initial costs [12].

EVs are good alternatives in countries with low emission electricity matrix and cities with small geographic extension, since in this case they can operate all day with a single recharge. According to Tarroja et al. [21], it is preferable to produce the electricity used in EVs from renewable sources, depending on availability and load demand.

The use of EVs may provoke increased emissions from electric power generation. Monteiro et al. [22] point out that the largest CO₂ producers are power plants, responsible by around 40% of the world electricity production. Therefore, for the use of EVs it is desirable low-emission electricity matrices, which is the case of Brazil, for instance, where CO₂ emissions from electricity generation are low (about 135 gCO₂/kWh) in comparison with other countries. In countries such as Poland and Greece, the CO₂ emission factor from electricity generation is around 850 gCO₂/kWh.

A study developed by Varga [23] used the AVL Cruise software to simulate four different types of electric vehicles to determine the energy consumption using the New European Driving Cycle (NEDC). The results for energy consumption ranged from 0.104 to 0.127 kWh/km. This data was used to calculate CO₂ emissions from those vehicles in Romania based on electric power plant emissions during the period from 2004 to 2008, producing values that varied from 84 to 115.9 g/km.

Yuan et al. [24] simulated an electric vehicle using the AVL Cruise software and evaluated CO₂ emissions for different driving cycles (New European Driving Cycle – NEDC, 1975 U.S. Federal Test Procedure – FTP-75, Japanese Modal Cycle – JC-0, and Worldwide Harmonized Light Duty Test Cycle – WLTC) and driving ranges in China. The authors used a high CO₂ emission factor range (736 g/kWh to 1147 g/kWh), taking coal as the main source of power generation in the country. The emission factor used was 855 g/kWh, although the

authors recognized that this value varies in the different parts of the country. Simulated results showed electric vehicle energy consumption around 0.16 kWh/km and CO₂ emissions about 105 g/km in the FTP-75 driving cycle. The authors concluded that, for the Chinese energy matrix, the use of EVs could reduce CO₂ emissions only for operation in distances shorter than 250 km, if compared to conventional vehicles.

The objective of this work is to analyze further the impacts of the replacement of conventional vehicles by electric vehicles on energy consumption and CO₂ emissions. The study is performed using the AVL Cruise software to simulate two similar vehicle models, one powered by an internal combustion engine and the other electric. The benefits of replacing conventional vehicles by EVs are verified using as a case study a taxi fleet of a Brazilian city, where hydroelectric power plants account for over 70% of electricity generation. The use of a renewable source of electricity is expected to increase the advantages of EVs in comparison with previous works, where the studies considered electric matrices based on fossil fuels. The extent of the reduction of CO₂ emission from the use of EVs powered by an electric matrix based on renewables is presented using different scenarios of gradual fleet replacement. An economic analysis was performed to verify the costs of replacement.

2. METHODOLOGY

The emissions of CO₂ from two vehicles of similar model were compared, one conventional, powered by an internal combustion engine (vehicle A), and the other electric (vehicle B). Table 1 presents the details of each vehicle. Vehicle A is the model that best represents the average taxi fleet in operation, which, in reality, is composed by different vehicle models. Both vehicles, A and B, were simulated under the Federal Test Procedure 75

(FTP-75) driving cycle using the AVL Cruise software. CO₂ emissions from vehicle A was calculated considering complete combustion [25], as follows:

(1)

The fuel consumption map of vehicle A, available from the manufacturer, was used to evaluate the equivalent energy consumption considering the fuel as a blend of composition 78% gasoline and 22% ethanol (E22), according to:

As no database is available in Brazil for other pollutant gas components emitted from power generation, CO₂ is the only component here evaluated, as it was done in previous studies [26,27]:

(3)

Four scenarios of different replacement rates of a conventional engine powered taxi fleet by electric vehicles were designed as a case study. The conventional fleet is composed by 213 vehicles, and the period of evaluation is 15 years. The fleet replacement rates adopted were 25%, 50%, 75% and 100%, with all vehicles being replaced in the beginning of the period of evaluation. Two scenarios were optimistic and two pessimistic (Tab. 3), and differ from each other according to the adopted CO₂ emission factor and average distance traveled by taxi per day. For each scenario daily travel distances of 200 km and 400 km by each taxi

were considered, representing the minimum and the maximum values. In holiday months, the taxis were assumed to travel an additional distance of 100 km per day.

In the first scenario, a low CO₂ emission factor of 30 gCO₂/kWh was considered, corresponding to the use of hydroelectric power to supply over 70% of the electricity demand. In scenario 2, the CO₂ emission factor was slightly higher than in scenario 1 (50 gCO₂/kWh) to consider a small replacement of hydroelectric power by thermoelectric power as a response to dry winter conditions, which reduce the capacity of hydroelectric power plants. In the third and fourth scenarios, the assumption of low rain levels per year means that most of the hydroelectric power is replaced by thermoelectric power, leading to the adoption of higher emission factors.

For the calculations, the EVs electric energy consumption and the fuel consumption of the conventional vehicles were taken as constant parameters. Each month was considered to have an average of 30 days. The EVs batteries were taken as fully charged early in the day. In all scenarios, an annual growth rate of 5% was assumed for the emission factors.

An economic analysis of the cash flow, present value and net present value was performed for both vehicles considering the cost of acquisition, operation and maintenance, and the taxi driver income. The analysis was based on the replacement of a conventional vehicle by an electric one. The acquisition price of the electric vehicle model studied in this work was estimated, because it is still a concept and is not yet available for retail, taking into consideration the price difference of other vehicle models publicly available in conventional and electric versions. Thus, the acquisition prices of US\$ 8,780.2611 for vehicle A and US\$ 34,382.26 for vehicle B were adopted. The operation costs were based on the fuel used by vehicle A and the electric energy consumed by vehicle B. The inflation rates for fuel and energy consumption were considered 4.00% yr. and 4.86% yr., respectively, which represent the average between 2004 and 2015. The operation costs of vehicle A (C_{Op}) are:

—

where $C_{Of,i}$ is fuel cost in 2015 (1.046 US\$/L), I_{Rf} is the fuel inflation rate (%), t is the period from the initial time (year), η_f is the fuel consumption efficiency of vehicle A (km/L), and d is the annual travel distance (km).

The operation costs of vehicle B (C_{Oe}) were calculated similarly to vehicle A:

—

where CO_{ei} is the energy cost in 2015 (0.226 US\$/kWh), I_{Re} is the energy inflation rate (%), and η_e is the energy consumption efficiency of vehicle B (kWh/km).

The maintenance costs for vehicle A was based on the study developed by Wang et al [28], taken as 0.215 US\$/km in 2015. According to some authors [28,29], the maintenance costs of electric vehicles are half that of conventional vehicles. Hence, the maintenance costs of vehicle B was considered 0.1075 US\$/km in 2015. The maintenance costs of vehicle A (C_{MA}) and vehicle B (C_{MB}) in the following years are calculated by:

(6)

(7)

where C_{MAi} and C_{MBi} are the maintenance costs of vehicle A and vehicle B in 2015, respectively, and I_R is the average annual inflation rate.

The revenue of the cash flow was taken as the taxi driver income, considering the taxi fare of 0.83 US\$/km. The taxi was considered to travel 200 km per day, with a lifecycle of 5 years, according to the law. The net present value (NPV) was calculated by:

where C_i is the initial cost (US\$), F_C is the cash flow (US\$) and I_D is the discount rate (%).

3. RESULTS

Results from the simulations of CO₂ emissions and fuel consumption, for vehicle A, and energy consumption, for vehicle B, are presented in Tabs. 3 and 4, respectively. Figure 1 shows the accumulated fuel energy consumption and CO₂ emissions of vehicle A, and the accumulated energy consumption of vehicle B. The accumulated energy consumption of vehicle A is nearly four times higher than that of vehicle B, showing that the use of EVs is highly advantageous in terms of energy consumption. This is a direct effect of the fuel conversion efficiency of the internal combustion engines used in conventional vehicles, which is typically around 25% and is much lower than the energy conversion efficiency of electric vehicles [16]. Figures 2 to 5 show CO₂ emissions that would be avoided with the replacement of the conventional vehicles by EVs in each scenario studied. In all scenarios, different emission factors and travel distances were considered.

Figure 2 shows the reduction of CO₂ emissions for 25% of fleet replacement by EVs. Scenarios 1 and 2 showed low reduction of CO₂ emissions, of around 770 tons of CO₂ by 2030, considering the travel distance of 200 km per day. Both scenarios show close results,

since the emissions factors have little difference. In scenarios 3 and 4, for which the emission factors are higher, the reductions reached around 700 tons of CO₂, lower than that of scenarios 1 and 2. This behavior was the same for all vehicle replacement rates, thus expressing a general trend. However, for taxis that operate 400 km a day, these values are higher, reaching 1,040 tons of CO₂ for scenarios 1 and 2, and 960 and 980 tons of CO₂ for scenarios 3 and 4, respectively.

The reduction of CO₂ emissions from the replacement of 50% of the fleet by EVs is presented in Fig. 3. Scenarios 1 and 2 showed a reduction of around 1,520 tons of CO₂ emissions, considering vehicle operation of 200 km per day. In scenarios 3 and 4, the reductions were 1,422 and 1,400 tons of CO₂, respectively. Considering the travel distance of 400 km, these values change to 2080 tons of CO₂ for scenarios 1 and 2, and 1,950 and 1,915 tons of CO₂ for scenarios 3 and 4, respectively.

Figure 4 shows the emissions reduction for replacing 75% of the taxi fleet. For vehicles that travel 200 km a day, scenarios 1 and 2 showed a reduction of around 2,280 tons of CO₂ by 2030. In scenarios 3 and 4, the reductions were 2,135 and 2,101 tons of CO₂, respectively. For the distance of 400 km, these values were 3,135 and 3,115 tons of CO₂ for scenarios 1 and 2, and 2,925 and 2,873 tons of CO₂ for scenarios 3 and 4, respectively.

Figure 5 shows the reduction of CO₂ emission if the whole fleet was replaced by EVs. For taxis that travel 200 km a day, scenarios 1 and 2 show that, by 2030, the reduction of CO₂ emissions will be 3,050 and 3,033 tons of CO₂, respectively. In scenarios 3 and 4, the reductions are 2,846 and 2,801 tons of CO₂. For the distance of 400 km, these values are 4,180 and 4,153 tons of CO₂ for scenarios 1 and 2, and 3,900, and 3,830 tons of CO₂ for scenarios 3 and 4, respectively.

It is noticeable that longer daily travel distance by taxi produced higher reduction of CO₂ emissions for all scenarios studied (Figs. 2 to 5). The use of EVs to replace the

conventional consistently caused significant reductions in CO₂ emissions, due to the low emissions of the Brazilian electricity sector. This situation is different compared to countries where the electric matrix is coal-based and, consequently, fleet replacement does not generate negative credits and can even increase emissions. In scenarios 1 and 2, for which low emission factors were considered, the reduction on CO₂ emissions from fleet replacement by EVs does not change substantially along the period studied. In scenarios 3 and 4, where the emission factors are high, the benefits on CO₂ emissions from the use of EVs are reduced along the period considered.

Figure 9 compares CO₂ emissions from conventional vehicles and EVs for both travel distances, 200 km and 400 km. For scenarios 1 and 2, where the emission factors are low, CO₂ emissions are around 50 to 64 times lower when EVs are used instead of conventional vehicles. However, this ratio is reduced to around 31 by the year 2030, still making the use of EVs advantageous. For scenarios 3 and 4, the reductions of CO₂ emission from the use of EVs are much lower due to the high emission factors. In the beginning of the period studied, EVs emitted about 20 times less than conventional vehicles with internal combustion engines. However, by 2030, the EVs will emit around 12 to 10 times less than conventional vehicles in scenarios 3 and 4.

Comparing the present results with those obtained by Yuan et al. [27], who simulated different types of electric vehicles in China, the calculated energy consumption was close. However, CO₂ emissions were higher (105 g/km) in that work due to high emission factors adopted for the electric matrix. In the present study, CO₂ emissions varied from 2.85 to 17.79 gCO₂/km, using Brazilian emission factors. These figures are also lower than the results presented by Varga [26], who calculated CO₂ emissions from power generation between 84 and 115.9 gCO₂/km in Romania. Although the study presented by Varga [26] used a different driving cycle, which can lead to some discrepancy in the results, the divergence of values can

be mainly attributed to the differences in the electric matrices. While in Brazil hydroelectric power plants generate most of the energy demanded, in the countries considered in those studies [26,27] energy generation is coal-based, thus explaining the lower levels of CO₂ emissions here obtained.

An economic analysis verified if the replacement of conventional taxis by electric taxis is feasible, mainly for scenarios 3 and 4, where the replacements are up to 75%. The results are presented in Tab. 5 and Fig. 7. Table 5 shows the values calculated for the taxi driver income, vehicle acquisition cost, and annual maintenance and operation costs. Only in 2015, the value of vehicle A is higher than vehicle B, because the acquisition price of electric vehicles is higher than conventional vehicles. Over the years, the use of vehicle A is more expensive than vehicle B because of the higher efficiency of electric vehicles in comparison with conventional ones and the lower price of electric energy in Brazil in comparison with the equivalent fuel energy. The net present value in 5 years was US\$ 125,362.49 and US\$ 141,116.15 for vehicles A and B, respectively.

4. CONCLUSION

This work investigated the replacement of conventional, compact engine-powered vehicles of a taxi fleet by electric vehicles of similar models at the rates of 25%, 50%, 75% and 100%, using two different daily travel distances. The electric power consumed by the EVs was generated under four different scenarios of increasing participation of thermoelectric power in an electric matrix mainly constituted by hydroelectric power, consequently adopting increasing CO₂ emission factors. From the results obtained for both vehicle types undergoing a simulated U.S. FTP-75 test schedule, the following conclusions can be drawn:

- The fuel energy content consumed by the conventional, engine powered vehicles is about four times higher than the electric energy consumed by the electric vehicles;
- A reduction of CO₂ emissions from substitution of conventional vehicles by electric vehicles was observed for all power generation scenarios, travel distances and replacement rates applied;
- The amount of reduced CO₂ emissions is directly proportional to the applied replacement rate of conventional vehicles by EVs;
- The reduction of CO₂ emissions from the use of EVs increased about 37% when the daily travel distance by the taxi fleet was doubled;
- During the 15 years period analyzed, the reduction of CO₂ emissions from the substitution of conventional vehicles by EVs was decreased by around 6.1%, for 25% replacement rate, and about 1.7%, for 100% replacement rate, due to an annual increase of CO₂ emission factors from electricity generation;
- The total replacement of the taxi fleet by EVs would have an immediate impact from 18% to 64% of CO₂ emission reduction, respectively considering the most unfavorable condition of electricity generation, with high substitution of hydroelectric power by thermoelectric power, and the most favorable condition of electricity generation, with over 70% of the electricity being supplied by hydroelectric power;
- At the end of the 15 years period, the total replacement of the taxi fleet by EVs would cause CO₂ emission reduction from 9% to 30%, for the most unfavorable and the most favorable power generation conditions, respectively.
- Although the acquisition cost of an electric vehicle is higher than a conventional vehicle, the EVs have lower operation costs.

- The economic analysis shows that the replacement of conventional vehicles by electric vehicles in a taxi fleet is feasible, being profitable from the second year of utilization under the conditions of this study.

5. ACKNOWLEDGEMENTS

The authors thank CAPES, CNPq research project 304114/2013-8, FAPEMIG research projects TEC PPM 0136-13 and TEC PPM 0385-15, ANEEL/CEMIG research project D425, and AVL AST for the financial support to this work.

6. REFERENCES

- [1] Baran, R.; Legey, L. F. L. The introduction of electric vehicles in Brazil: Impacts on oil and electricity consumption. *Technological Forecasting & Social Change*, Vol. 80, pp 907–917, 2013.
- [2] Wu, Y. Energy consumption and CO₂ emission impacts of vehicle electrification in three developed regions of China, *Energy Policy*, Vol. 48, pp 537–550, 2012.
- [3] Mathiesen BV, Lund H, Karlsson K. 100% renewable energy systems, climate mitigation and economic growth. *Appl Energy* 2011;88(2):488-501.
- [4] Lund H, Mathiesen BV. Energy system analysis of 100% renewable energy systems - the case of Denmark in years 2030 and 2050. *Energy* 2009;34(5): 524-31.
- [5] Lund H, Andersen AN, Østergaard PA, Mathiesen BV, Connolly D. From electricity smart grids to smart energy systems e a market operation based approach and understanding. *Energy* 2012;42(1):96-102.

- [6] Barkenbus, J. Our electric automotive future: CO₂ savings through a disruptive technology. *Policy and Society*, Vol. 27, pp 399–410, 2009.
- [7] Becker, T.A. *Electric Vehicles in the United States—A New Model with Forecasts to 2030*, Center for Entrepreneurship & Technology University of California, Berkeley—Technical Brief, 2009.
- [8] Flórez-Orrego, D.; Silva, J. A. M.; Velásquez, H.; Oliveira Jr., S. Renewable and non-renewable exergy costs and CO₂ emissions in the production of fuels for Brazilian transportation sector, *Energy*, Vol.88, pp 18-36, 2015.
- [9] Lund, H; Kempton, W. Integration of renewable energy into the transport and electricity sectors through V2G. *Energy Policy*, Vol. 36, pp 3578-3587, 2008.
- [10] Axsen, J.; Orlebar, C.; Skippon, S. Social influence and consumer preference formation for pro-environmental technology: The case of a U.K. workplace electric-vehicle study. *Ecological Economics*, Vol.95, pp 96-107, 2013.
- [11] Hoyer, K. G. The history of alternative fuels in transportation: The case of electric and hybrid cars, *Utilities Policy*, Vol. 16, pp 63-71, 2008.
- [12] Graham-Rowe, E. et al. Mainstream consumers driving plug-in battery-electric and plug-in hybrid electric cars: A qualitative analysis of responses and evaluations, *Transportation Research*, Vol. 46, pp 140-153, 2012.
- [13] Riezenman, M. J. Electric vehicles, *IEEE Spectrum*, Vol. 29, pp 18-21, 1992.
- [14] Bradley, T. H.; Frank, A. A. Design, Demonstration and Sustainability Impact Assessments for Plug-In Hybrid Electric Vehicles, *Renewable Sustainable Energy Reviews*, Vol. 13, n.1, pp 115–128, 2009.
- [15] Weiller, C.; Neely, A. Using electric vehicles for energy services: Industry perspectives, *Energy*, Vol. 77, pp 194-200, 2014.

- [16] Shukla, A. K.; Aricò, A. S.; Antonucci, V., An Appraisal of Electric Automobile Power Sources, *Renewable and Sustainable Energy Reviews*, Vol. 5, No. 2, pp 137–155, 2011
- [17] Benysek, G.; Jarnut, M. Electric vehicle charging infrastructure in Poland, *Renewable and Sustainable Energy Reviews*, Vol. 16, pp 320– 328, 2012.
- [18] Dijk, M.; Orsato, R. J.; Kemp, R. The emergence of an electric mobility trajectory, *Energy Policy*, Vol. 52, pp 135–145, 2013.
- [19] Cui, X. et al. Simulating the Household Plug-In Hybrid Electric Vehicle Distribution and Its Electric Distribution Network Impacts, *Transportation Research Part D*, Vol. 17, No. 7, pp 548–554, 2012.
- [20] Jungst, R. Recycling of electric vehicles batteries, *Industrial Chemistry Library*, Vol. 10, pp 295–327, 2001.
- [21] Tarroja, B.; Shaffer, B.; Samuelsen, S. The importance of grid integration for achievable greenhouse gas emissions reductions from alternative vehicle technologies, *Energy*, Vol. 87, pp 504-519, 2015.
- [22] Monteiro, V.; Gonçalves, H.; Afonso, J. L. Impact of electric vehicle on power quality in a smart grid context. 11th International Conference on Electrical Power Quality and Utilisation (EPQU), 2011, 6 p.
- [23] Varga, B. O. Electric vehicles, primary energy sources and CO₂ emissions: Romanian case study, *Energy*, Vol. 49, pp 61-70, 2013.
- [24] Yuan, X.; Li, L.; Gou, h.; Dong, T. Energy and environmental impact of battery electric vehicle range in China, *Applied Energy*, Vol. 157, pp 75–84, 2015.
- [25] Oh, Y.; Park J.; Lee, J.; Eom, M.D.; Park, S. Modeling effects of vehicle specifications on fuel economy based on engine fuel consumption map and vehicle dynamics. *Transportation Research Part D*, Vol. 32, pp. 287–302, 2014.

- [26] Howey, D. A. et al. Comparative measurements of the energy consumption of 51 electric, hybrid and internal combustion engine vehicles, *Transportation Research Part D*, Vol. 16, pp 459–464, 2011.
- [27] Lorf, C. et al. Comparative analysis of the energy consumption and CO₂ emissions of 40 electric, plug-in hybrid electric, hybrid electric and internal combustion engine vehicles, *Transportation Research Part D*, Vol. 23, pp 12–19, 2013.
- [28] Wang, N. et al. Cost–benefit assessment and implications for service pricing of electric taxis in China, *Energy for Sustainable Development*, Vol. 27, pp 137–146, 2015.
- [29] Bickert, S. et al. Developments of CO₂-emissions and costs for small electric and combustion engine vehicles in Germany, *Transportation Research Part D*, Vol. 36, pp 138–151, 2015.

7. NOMENCLATURE

C_F	Fuel carbon content
C_{MAi}	Cost of maintenance of conventional vehicle in the initial year (2015) (US\$/year)
C_{MBi}	Cost of maintenance of electrical vehicle in the initial year (2015) (US\$/year)
$C_{Oe,i}$	Energy cost in the initial year (2015) (US\$/kWh)
$C_{Of,i}$	Fuel cost in the initial year (2015) (US\$/L)
CO_2	Carbon dioxide
d	Travel distance in the FTP-75 test schedule or annual traveled distance (km)
E_E	Electric energy consumption (kW.h/km)
E_F	Fuel energy consumption (kW.h/km)
EVs	Electric vehicles
f_{CO_2}	Emission factor of CO ₂ (tCO ₂ /kWh)
FTP-75	Federal Test Procedure 75

I_D	Discounted rate (%)
ICEVs	Vehicles with internal combustion engine
JC-0	Japanese Modal Cycle
	Fuel consumption (kg/h)
M_{CO_2}	Molar mass of CO ₂ (kg/kmol)
M_F	Molar mass of fuel (kg/kmol)
NEDC	New European Driving Cycle
NPV	Net Present Value
Q_{LHV}	Low heating value of fuel (kJ/kg)
SIN	Brazilian National Grid System
t	Travel time in the FTP-75 test schedule (h) or time after initial year (year)
I_R	Average annual inflation rate y.y (%)
I_{Re}	Energy inflation rate y.y (%)
I_{Rf}	Fuel (gasoline) inflation rate y.y (%)
WLTC	Worldwide Harmonized Light Duty Test Cycle
η_f	Fuel consumption efficiency of conventional vehicle (km/L)
η_e	Energy consumption efficiency of electric vehicle (kW.h/km)

LIST OF TABLE CAPTIONS

Table 1. Details of vehicles.

Table 2. Scenarios of vehicle fleet replacement.

Table 3. CO₂ emissions, fuel and energy consumption of vehicle A.

Table 4. Accumulated and specific energy consumption of vehicle B.

Table 5. Results from the economic analysis.

LIST OF FIGURE CAPTIONS

Figure 1. Accumulated fuel energy consumption and CO₂ emissions of vehicle A, and accumulated electric energy consumption of vehicle B.

Figure 2. CO₂ reduction for replacement of 25% of the taxi fleet.

Figure 3. CO₂ reduction for replacement of 50% of the taxi fleet.

Figure 4. CO₂ reduction for replacement of 75% of the taxi fleet.

Figure 5. CO₂ reduction for replacement of 100% of the taxi fleet.

Figure 6. Ratio between CO₂ emissions from the vehicles powered by internal combustion engines (ICEV) and from the electric vehicles (EV).

Figure 6. Cash flow and present value over the years.

Table 1. Details of vehicles.

PARAMETER	SPECIFICATION	
	VEHICLE A	VEHICLE B
Bore × stroke	70.0 mm × 64.9 mm	-
Compression ratio	12.15:1	-
Volume displacement	1.0 L	-
Rated power	53.7 kW @ 6250 rpm	15 kW
Rated torque	93.2 Nm @ 4500 rpm	50 Nm
Fuel	E22	-
Battery type	-	Sodium-Nickel-Chlorine
Voltage	-	253 V
Energy	-	19.2 kW.h
Recharge time	-	8 hours

Table 2. Scenarios of vehicle fleet replacement.

SCENARIO	CO ₂ EMISSION FACTOR (gCO ₂ /kWh)	WEATHER CONDITIONS	DISTANCE TRAVELED BY A TAXI FOR A DAY (km)
1	30	Favorable	200 – 400
2	30 – 50		
3	90	Unfavorable	
4	90 – 140		

Table 3. CO₂ emissions, fuel and energy consumption of vehicle A.

VEHICLE A	
CO ₂ emissions (g/km)	182.74
Fuel consumption (km/L)	11.91
Energy consumption (kWh/km)	0.6830

Table 4. Accumulated and specific energy consumption of vehicle B.

VEHICLE B	
Accumulated energy consumption (kWh)	2.267
Specific energy consumption (kWh/km)	0.0951

Table 5. Results from the economic analysis.

VEHICLE A							
Year	Revenue	Acquisition Cost	Annual Maintenance	Operation	Cash Flow	Present Value	Net Present Value
2015	\$39,988.67	-\$8,780.11		-\$4,249.78	\$26,958.78	\$26,958.78	
2016	\$39,988.67		-\$10,337.21	-\$4,419.77	\$25,231.69	\$23,673.95	
2017	\$39,988.67		-\$11,742.34	-\$4,596.56	\$23,649.77	\$20,819.75	\$123,170.22
2018	\$39,988.67		-\$12,514.98	-\$4,780.42	\$22,693.26	18,744.32	
2019	\$39,988.67		-\$13,338.47	-\$4,971.63	\$21,678.56	16,800.70	
2020	\$39,988.67		-\$12,576.79	-\$5,170.50	\$22,241.37	16,172.71	
VEHICLE B							
Year	Revenue	Acquisition Cost	Annual Maintenance	Operation	Cash Flow	Present Value	Net Present Value
2015	\$39,988.67	-\$28,090.14		-\$1,028.85	\$10,869.66	\$10,869.66	
2016	\$39,988.67		-\$5,168.60	-\$1,078.86	\$33,741.20	\$31,658.09	
2017	\$39,988.67		-\$5,871.16	-\$1,131.29	\$32,986.20	\$29,038.94	\$141,116.15
2018	\$39,988.67		-\$6,257.49	-\$1,186.27	\$32,544.89	\$26,881.64	
2019	\$39,988.67		-\$6,669.23	-\$1,243.92	\$32,075.50	\$24,858.25	
2020	\$39,988.67		-\$7,108.07	-\$1,304.38	\$31,576.21	\$22,960.50	

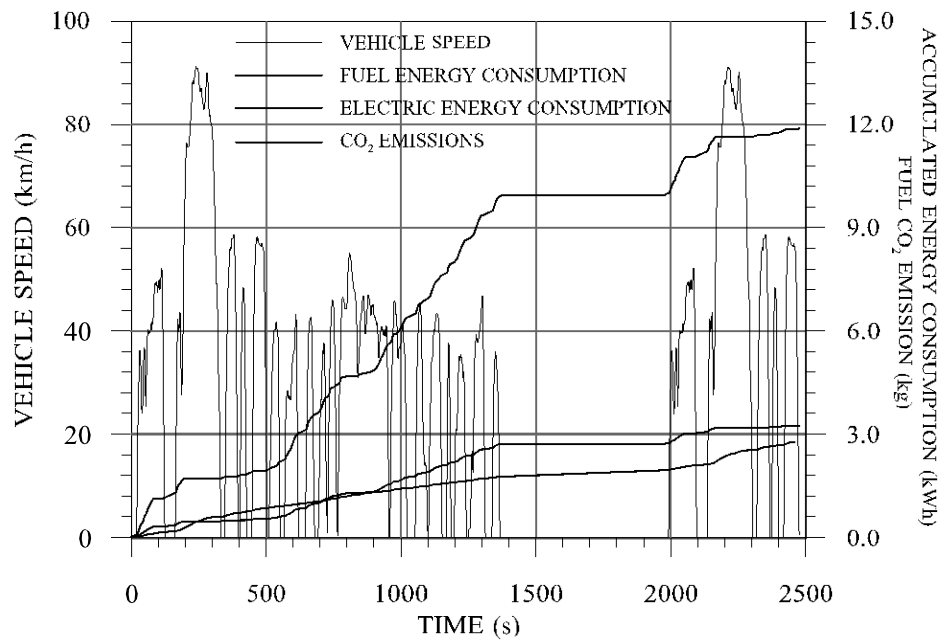


Figure 1. Accumulated fuel energy consumption and CO₂ emissions of vehicle A, and accumulated electric energy consumption of vehicle B.

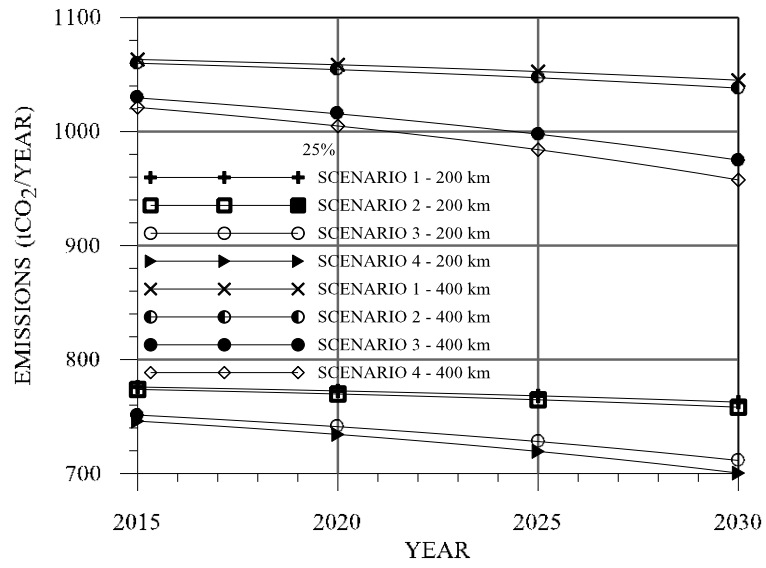


Figure 2. CO₂ reduction for replacement of 25% of the taxi fleet.

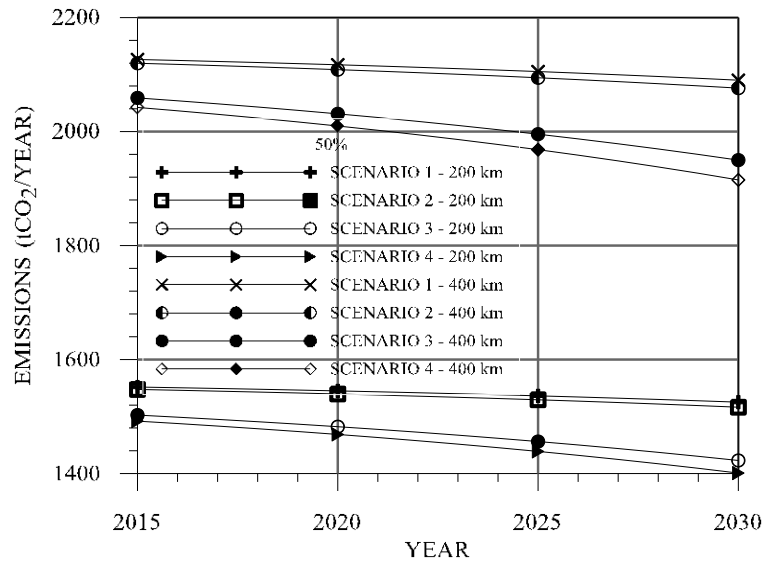


Figure 3. CO₂ reduction for replacement of 50% of the taxi fleet.

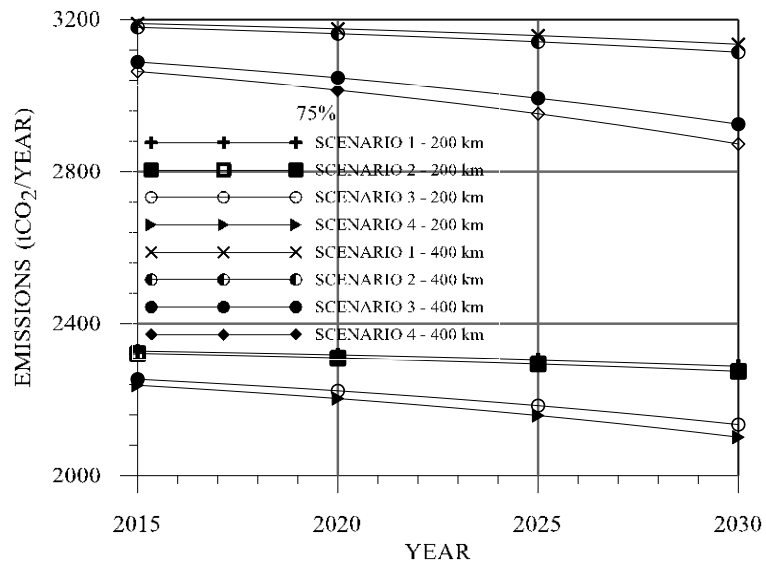


Figure 4. CO₂ reduction for replacement of 75% of the taxi fleet.

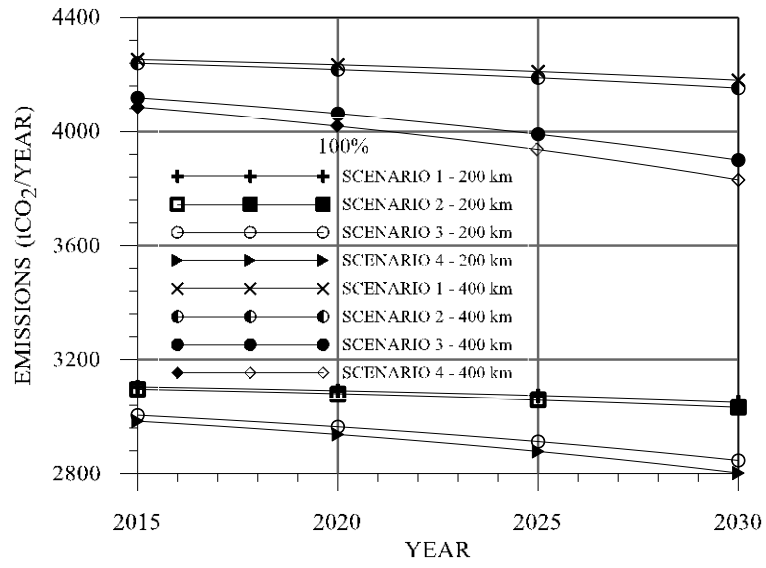


Figure 5. CO₂ reduction for replacement of 100% of the taxi fleet.

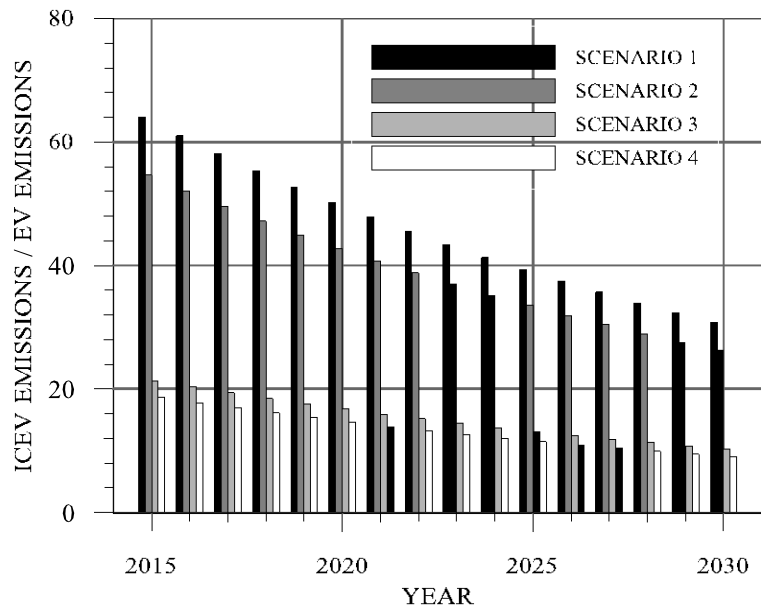


Figure 6. Ratio between CO₂ emissions from the vehicles powered by internal combustion engines (ICEV) and from the electric vehicles (EV).

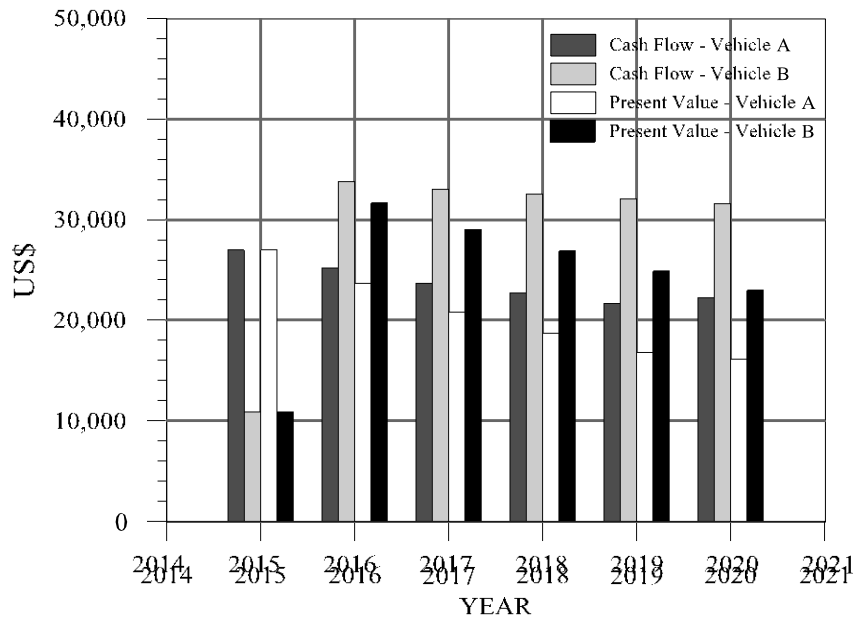


Figure 6. Cash flow and present value over the years.

LIST OF TABLE CAPTIONS

Table 1. Details of vehicles.

Table 2. Scenarios of vehicle fleet replacement.

Table 3. CO₂ emissions, fuel and energy consumption of vehicle A.

Table 4. Accumulated and specific energy consumption of vehicle B.

Table 5. Results from the economic analysis.

Table 1. Details of vehicles.

PARAMETER	SPECIFICATION	
	VEHICLE A	VEHICLE B
Bore × stroke	70.0 mm × 64.9 mm	-
Compression ratio	12.15:1	-
Volume displacement	1.0 L	-
Rated power	53.7 kW @ 6250 rpm	15 kW
Rated torque	93.2 Nm @ 4500 rpm	50 Nm
Fuel	E22	-
Battery type	-	Sodium-Nickel-Chlorine
Voltage	-	253 V
Energy	-	19.2 kW.h
Recharge time	-	8 hours

Table 2. Scenarios of vehicle fleet replacement.

SCENARIO	CO ₂ EMISSION FACTOR (gCO ₂ /kWh)	WEATHER CONDITIONS	DISTANCE TRAVELED BY A TAXI FOR A DAY (km)
1	30	Favorable	200 – 400
2	30 – 50		
3	90	Unfavorable	
4	90 – 140		

Table 3. CO₂ emissions, fuel and energy consumption of vehicle A.

VEHICLE A	
CO ₂ emissions (g/km)	182.74
Fuel consumption (km/L)	11.91
Energy consumption (kWh/km)	0.6830

Table 4. Accumulated and specific energy consumption of vehicle B.

VEHICLE B	
Accumulated energy consumption (kWh)	2.267
Specific energy consumption (kWh/km)	0.0951

Table 5. Results from the economic analysis.

VEHICLE A							
Year	Revenue	Acquisition Cost	Annual Maintenance	Operation	Cash Flow	Present Value	Net Present Value
2015	\$39,988.67	-\$8,780.11		-\$4,249.78	\$26,958.78	\$26,958.78	
2016	\$39,988.67		-\$10,337.21	-\$4,419.77	\$25,231.69	\$23,673.95	
2017	\$39,988.67		-\$11,742.34	-\$4,596.56	\$23,649.77	\$20,819.75	\$123,170.22
2018	\$39,988.67		-\$12,514.98	-\$4,780.42	\$22,693.26	18,744.32	
2019	\$39,988.67		-\$13,338.47	-\$4,971.63	\$21,678.56	16,800.70	
2020	\$39,988.67		-\$12,576.79	-\$5,170.50	\$22,241.37	16,172.71	
VEHICLE B							
Year	Revenue	Acquisition Cost	Annual Maintenance	Operation	Cash Flow	Present Value	Net Present Value
2015	\$39,988.67	-\$28,090.14		-\$1,028.85	\$10,869.66	\$10,869.66	
2016	\$39,988.67		-\$5,168.60	-\$1,078.86	\$33,741.20	\$31,658.09	
2017	\$39,988.67		-\$5,871.16	-\$1,131.29	\$32,986.20	\$29,038.94	\$141,116.15
2018	\$39,988.67		-\$6,257.49	-\$1,186.27	\$32,544.89	\$26,881.64	
2019	\$39,988.67		-\$6,669.23	-\$1,243.92	\$32,075.50	\$24,858.25	
2020	\$39,988.67		-\$7,108.07	-\$1,304.38	\$31,576.21	\$22,960.50	